



FICHA TECNICA

Datasheet of Solenoid Valve

PARAMETER:

- Ref. No.: SH-SV01
- Type: Solenoid Valve (Magnetic valve)
- Port Size: 1/2"~2", DN15~DN50
- Material: **Stainless steel**
- Input voltage: DC12V or DC24 / AC110V or 220V
- Input Frequency: 50-60Hz
- Power factor(PF): >0.95
- Media:Water
- Structure: Diaphragm
- Operation Type: Normally open or Normally close
- Number of Ways: 2 Way
- Connection:Threaded, Flanged
- Work temperature: —30℃~100℃
- Work humidity: 10%~95%RH
- Warranty: 5 year
- IP grade: IP65
- Certification: ISO9001
- Valve body : Brass
- Sealing Material:NBR, EPDM
- Color: Brass color



PRODUCT DETAILS:




no-leakage




thread deep and long



FICHA TECNICA

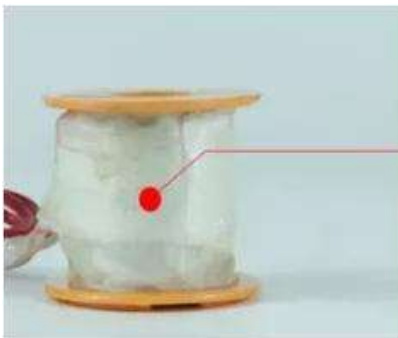

insulation paper

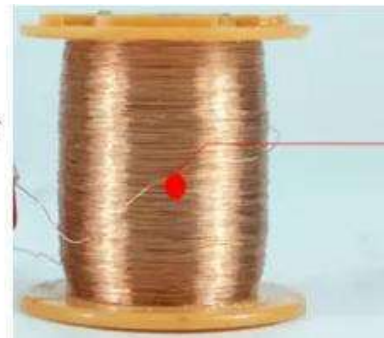


100% copper






FICHA TECNICA

WORKING PRINCIPLE:

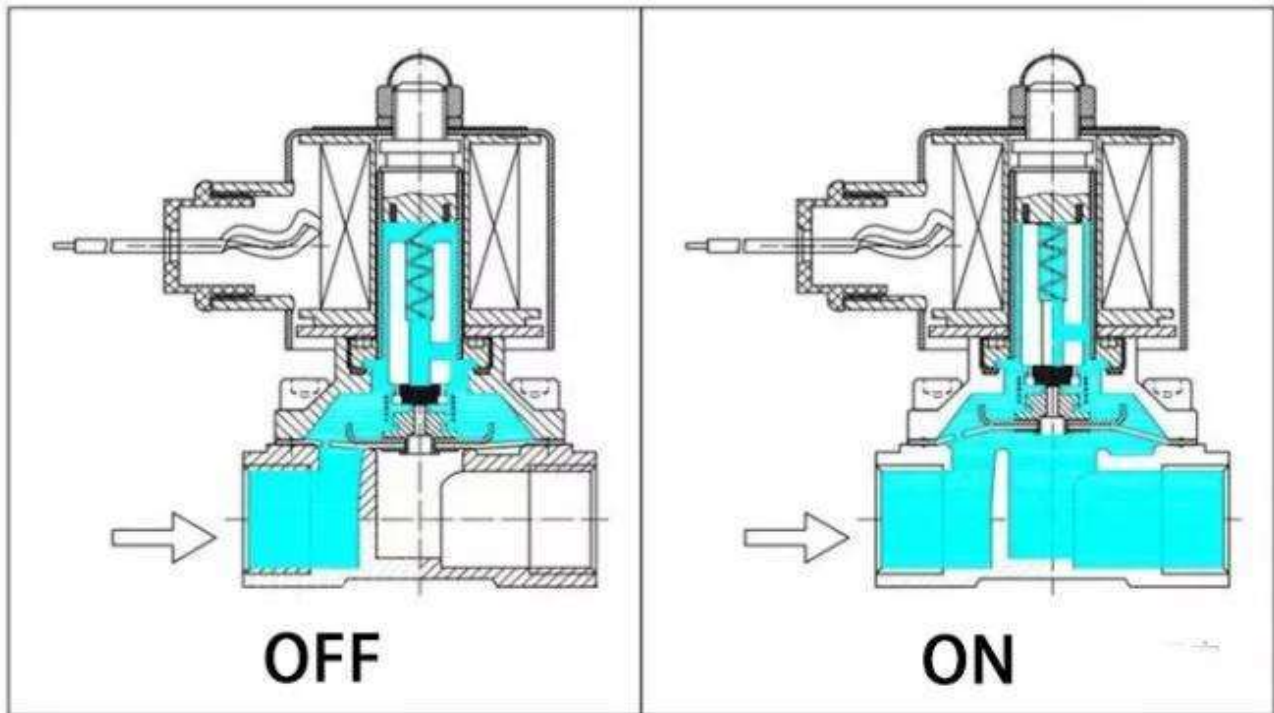

PRODUCT DIMENSIONS AND WEIGHT:

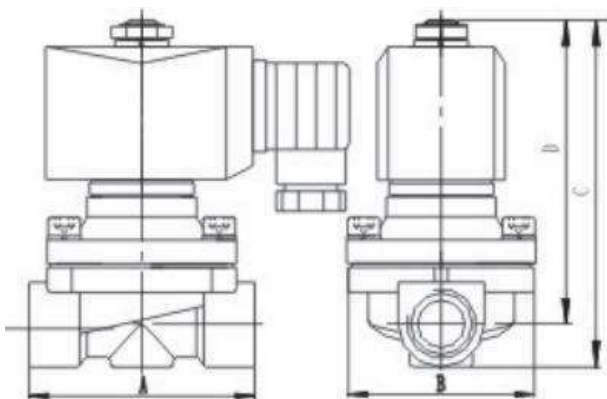

Model	A	B	C	D	Weight (Kg)	
					Brass	SS
2W-15N	63	56	107	91	0.63	0.8
2W-20N	66	56	110	95	0.9	0.83
2W-25N	85	72	118	103	0.88	1.2
2W-32N	99	78	130	129	2.0	1.2
2W-40N	105	88	160	134	1.88	2.0
2W-50N	133	93	180	151	2.35	4.0



FICHA TECNICA

USAGE :



Outdoor



pipeline water control



water heater



outdoor irrigation