





产品型号 Product model	BEM-72VD 温控器/thermostat		
温度范围 temperature range	0~400°C	输入规格 Input specifications	K型 Type K
设定精度 Setting accuracy	±1.5%全刻度以内 Within ±1.5% of full scale	指示精度 Indicating accuracy	±1.0%全刻度以内 Within ±1.0% of full scale
控制动作 Control action	位式, 比例式 (PD) Position, proportional type (PD)		
输出方式 output method	继电器接点5A 250VAC Relay contact 5A 250VAC		
额定电压 Rated voltage	AC: 110V/220V ±15%, 50/60Hz		
比例周期 Proportional period	继电器: 20秒 Relay: 20 seconds	消耗功率 consumed power	About ≤ 3.VA
附属功能 Ancillary function	感温线断线检知 Temperature sensing wire disconnection detection		
使用周围环境 Use environment	温度: 0°C~+50°C, 湿度: ≤ 85%RH Temperature: 0°C~+50°C, humidity: ≤ 85%RH		
外型尺寸 Instrument size	72X72X113MM	开孔尺寸 Hole Size	68X68MM
重量 weight	1pcs/0.194KG 50pcs/1箱(box)	单价 unit price	

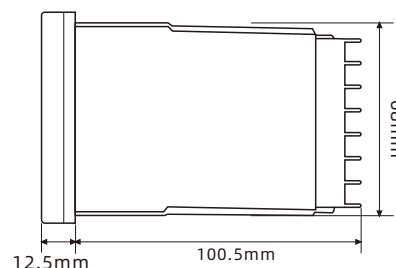

产品型号 Product model	BEM-96VD 温控器/thermostat		
温度范围 temperature range	0~400°C	输入规格 Input specifications	K型 Type K
设定精度 Setting accuracy	±1.5%全刻度以内 Within ±1.5% of full scale	指示精度 Indicating accuracy	±1.0%全刻度以内 Within ±1.0% of full scale
控制动作 Control action	位式, 比例式 (PD) Position, proportional type (PD)		
输出方式 output method	继电器接点5A 250VAC Relay contact 5A 250VAC		
额定电压 Rated voltage	AC: 110V/220V ±15%, 50/60Hz		
比例周期 Proportional period	继电器: 20秒 Relay: 20 seconds	消耗功率 consumed power	About ≤ 3.VA
附属功能 Ancillary function	感温线断线检知 Temperature sensing wire disconnection detection		
使用周围环境 Use environment	温度: 0°C~+50°C, 湿度: ≤ 85%RH Temperature: 0°C~+50°C, humidity: ≤ 85%RH		
外型尺寸 Instrument size	96X96X119MM	开孔尺寸 Hole Size	92X92MM
重量 weight	1pcs/0.384KG 44pcs/1箱(box)	单价 unit price	

