



Y 订购码 / Ordering Code

2L	170	-	15	AC110V
				工作电压 Operating Voltage
				AC110V 50/60Hz AC220V 50/60Hz AC380V 50/60Hz
				接管口径 Join Pipe Bore
				15: 1/2" 20: 3/4" 25: 1" 35: 1 1/4" 40: 1 1/2" 50: 2"
				流量孔径 Aperture Of Flow Rate
				170: 17mm 200: 22mm 300: 30mm 500: 50mm
				蒸汽型 Steam Type

Y 产品特点 / Product Feature

适用于蒸汽，热水，液体等介质的控制，采用先导活塞式，聚四氟乙烯(PTFE)密封，阀体材质为黄铜。
Suitable for steam, hot water, liquids and other media control, the pilot piston, polytetrafluoroethylene (PTFE) sealing body made of brass.


Y 建议 / Proposal

- 流体中含有杂质，应在阀前安装过滤器(滤网≥60目)。
- 电磁阀应水平安装，线圈向上，阀体标注方向必须与介质流向一致。
- fluid contains impurities, the filter should be installed before the valve (≥ 60 mesh strainer).
- The solenoid valve should be installed horizontally, coil up, the direction of the body marks must be consistent with the medium flow consistent with the medium flow.


Y 技术参数 / Technical Data

型号 Moled	2L170-10	2L170-15	2L170-20	2L200-25	2L300-35	2L300-40	2L500-50
使用介质 Work Medium	空气、水、蒸汽/Air, Water, Steam						
动作方式 Motion Pattern	先导式/Guide Type						
型式 Type	常闭型/Normal Clcse Type						
流量孔径(mm) Aperture Do Flow Ratea	17			22	30	50	
Cv值 Cv Value	4.8			12	20	48	
接管口径 Joint Pipe Bore	3/8"	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"
使用流体粘滞度 Operation Fluid Viscosity	20CST以下(Below)						
使用压力(kgf/cm²) Working-pressure	1~15						
最大耐压力(kgf/cm²) Max. Pressure Resistance	22.5						
工作温度范围(°C) Operating Temperature Rang	-5~180						
使用电压范围 Voltge Range	± 10% AC220V 110V50Hz/60Hz 50VA						
本体材质 Material Of Boby	黄铜/Brass						
油封材质 Material Of Oil Saeal	聚四氟乙烯(PTFE)						

Y 外形尺寸 / Overall Dimension Drawing(mm)

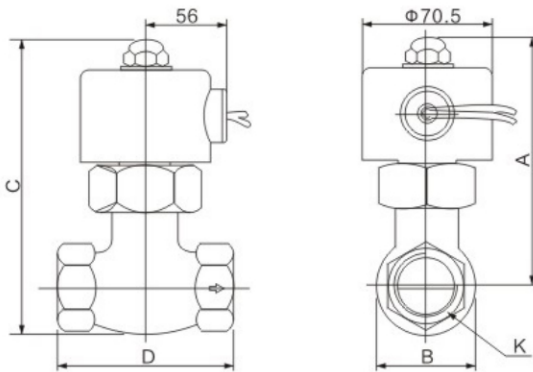

Y 内部结构 / Inner Consturction

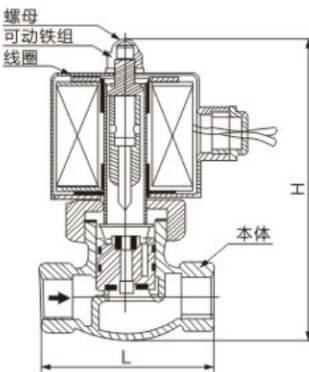

Y 尺寸表 / Dimension Sheet

型号 Moled	2L170-10	2L170-15	2L170-20	2L200-25	2L300-35	2L300-40	2L500-50
A	125	125	125	136	148	148	176
B	42	42	42	52	74	74	94.5
C	146	146	146	162	185	183	223
D	82	82	82	90.5	111	111	163
K(PT)	3/8"	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"